

# Special Solutions




Vacuum Lifting



More information: [www.uplifter.de](http://www.uplifter.de)

## DSZ 900

**Wired remote control**

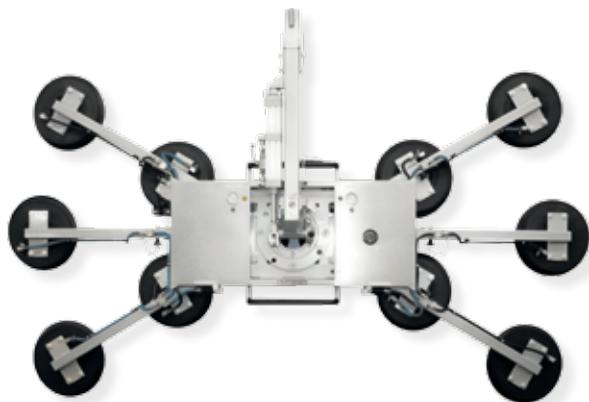

### Technical Data

<b>Vacuum System</b>	2-circuit-system
<b>Lifting Capacity</b>	up to 900 kg
<b>Vacuum Cups</b>	6   8   10   12
<b>Tare Weight</b>	90 kg   100 kg   110 kg   120 kg
<b>Height</b>	min. 180mm
<b>Operating Temperature</b>	-1° up to 35° C
<b>Operating Time</b>	8 hours
<b>Highlight</b>	lowering cylinder
<b>Accessory</b>	transport
<b>Optional</b>	wireless remote control

### Features

- » Manual tilting 90°
- » Manual turning 360°
- » Off-grid motor with 12 volts rechargeable battery
- » LED Battery-Status Display
- » DIN EN 13155
- » Individual arrangement of the spring mounted vacuum cups(Ø330mm) without tools
- » Optic / acoustic warning devices (low vacuum warning buzzer)

## DSMH2-12V

**Wired remote control**



### Technical Data

<b>Vacuum System</b>	2-circuit-system
<b>Lifting Capacity</b>	up to 1.200 kg
<b>Vacuum Cups</b>	16 (Ø 330 mm)
<b>Tare Weight</b>	280 kg
<b>Height</b>	min. 280mm
<b>Operating Temperature</b>	-1° up to 35° C
<b>Operating Time</b>	8 hours
<b>Accessory</b>	incl. transport dolly
<b>Optional</b>	wireless remote control

### Features

- » Hydraulic tilting 90°
- » Motorized turning 360°
- » With wired remote control
- » Off-grid motor with 12 volts rechargeable battery
- » DIN EN 13155
- » Extensions for wide elements
- » Optic/acoustic warning devices (low vacuum warning buzzer)

# DSZ 2000

**Wired remote control**

## Technical Data

<b>Vacuum System</b>	4-circuit-system
<b>Lifting Capacity</b>	up to 700 kg
<b>Vacuum Cups</b>	12
<b>Tare Weight</b>	700 kg
<b>Height</b>	min. 430
<b>Operating Temperature</b>	-1° up to 35° C
<b>Operating Time</b>	8 hours
<b>Dimensions</b>	3160 x 1850 mm
<b>Optional</b>	wireless remote control



## Features

- |  |   |
|--|---|
| » Hydraulic tilting 90°                                | » With wired remote control                                     |
| » Motorized turning 360°                               | » DIN EN 13155  |
| » Off-grid motor with 12 volts<br>rechargeable battery | » Optic/acoustic warning devices<br>(low vacuum warning buzzer) |

Your contact person:



#### UPLIFTER GmbH & Co. KG

Oberaich 5 | D-92543 Guteneck | Tel.: +49 (0) 94 33 / 2 04 99-0 | Fax +49 (0) 94 33 / 2 04 99-29 | [info@uplifter.de](mailto:info@uplifter.de)  
[www.uplifter.de](http://www.uplifter.de)